



Plastic Safety  
Systems, Inc.

# PSS Recommendations for Sign Placement on Anchor® Type III Barricades

Our Anchor Type III Barricade is the most innovative, feature-laden system on the market today. It is NCHRP-350 certified and MUTCD compliant.

The Anchor Type III Barricade enjoys multiple FHWA acceptance letters. Copies of each WZ letter are available on our web site, [www.plasticsafety.com](http://www.plasticsafety.com).

Specifically, FHWA acceptance letter WZ-233, issued to PSS in April, 2006, allows the use up to 25 square feet of signage on the Anchor.

Routinely, the sign employed is a "Road Closed" sign, in a 30" x 60" configuration. The "Road Closed" sign is often used with a 24" x 48" arrow sign. The arrow sign may or may not include the "Detour" advisory.

We recommend installers place signs on our Anchor Type III Barricade as follows:

**Example 1:** Anchor with a 24" x 48" Arrow Sign:  
Fasten the sign to the top Wave® barricade panel, utilizing the corresponding "molded through" holes on the Mast® Upright.



**Example 2:** Anchor Barricade with a 30" x 60" "Road Closed" sign: Same instructions as Example 1.



**Example 3:** Anchor Barricade with both signs: Fasten the larger sign with the top set of "molded-through" holes, the smaller sign with the center set.






Plastic Safety Systems, Inc.

# PSS Recommendations for Sign Placement on Anchor® Type III Barricades

**Back of Example 3:** Showing signs fastened to Wave barricade panels, using the top and center sets of Mast Upright holes.

Close-up of sign, panel and upright

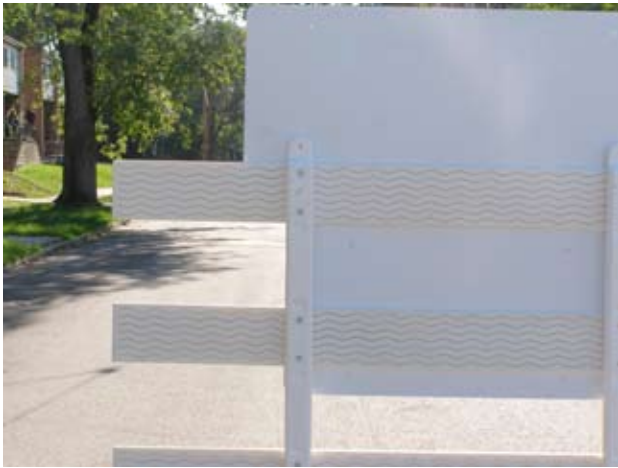

The Mast weighs only 4.5 lbs.

Molded-in Warning Light mount and flag holes provide one-piece functionality.

“Press-fit” installation. No tools required.

Raised Centerboard Locators (RCL)

Warning Light mount fixture.

Molded through holes.

Easy, quick alignment. No measuring required.

